


AUGUST 1960

7817

PHOTOMULTIPLIER

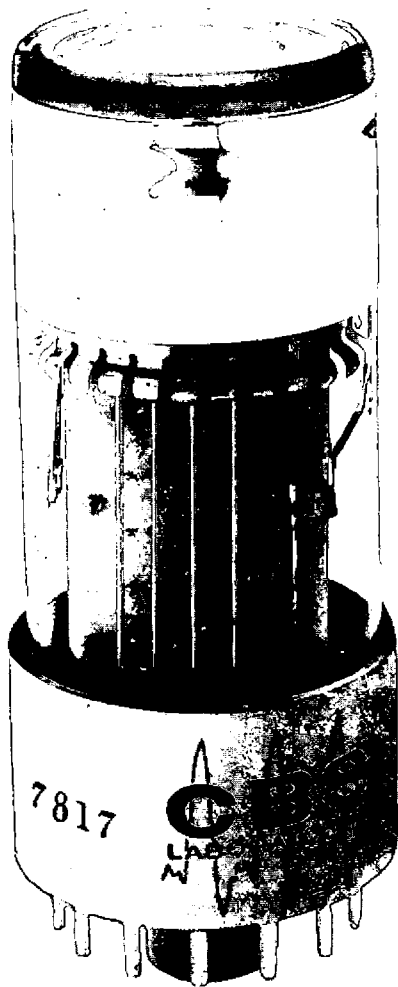

The CBS Type 7817 supersedes and is a direct replacement for CBS Type CL-1002. Type 7817 is a 10-stage, 2 inch diameter, end-on photomultiplier sensitive to the blue region of the spectrum. The faceplate is plano-concave with the photocathode deposited on the curved surface. This design insures excellent uniformity of response across the face of the tube. Use of the curved photocathode in conjunction with the linear multiplier structure provides short transit time spread. The tube utilizes silver magnesium dynodes. Type 7817 is intended for use in scintillation counting, spectroscopy, photometry and flying spot scanner applications.

GENERAL DATA

Spectral Response	S-11
Photocathode	Semi-transparent
Photocathode Window	Circular end-on type
Window Diameter	1.745 inches (min.)
Window Index of Refraction	1.51
Tube Diameter	2 ± 1/16 inches
Overall Length	5-5/8 ± 1/8 inches
Seated Height to Center of Window	4-7/8 ± 1/8 inches
Mounting Position	Any
Weight (approximate)	179 gm.
Base	Medium shell diheptal 14 pin (JETEC No. B14-38) Non-Hygroscopic
Wavelength at Maximum Response	4400 ± 500 angstroms
Wavelength at 10% of Maximum Response on Long Wavelength Side	6125 ± 275 angstroms
Wavelength at 10% of Maximum Response on Short Wavelength Side	3250 ± 250 angstroms

MAXIMUM RATINGS

	Units
Supply Voltage (DC or peak AC) between Anode and Cathode	2000 volts
Supply Voltage (DC or peak AC) between Last Dynode and Anode	250 volts
Supply Voltage (DC or peak AC) between Cathode and First Dynode	400 volts
Supply Voltage (DC or peak AC) between Cathode and Focusing Electrode (See Note 5)	400 volts
Average Anode Current (See Note 6)	5 ma
Average Anode Dissipation (See Note 6)	1 watt
Environmental Conditions (Non-operating): Ambient Storage Temperature +75 °C Shock: 40 g, 11 ms. duration (See Note 7) Vibration: 0.35" double amplitude displacement: 0-25 cycles 10 g: 25-2000 cycles	



(See Notes 7, 8)

CHARACTERISTIC
ELECTRICAL DATA

	Min.	Avg.	Max.	Units
Cathode Radiant Sensitivity at 4400 Å		.056		µa/µw
Cathode Luminous Sensitivity	50	80		µa/lumen
Anode Radiant Sensitivity at 4400 Å, 1250 volts between cathode and anode (See Note 3)		1.26×10^{-3}		amp/µw
Anode Luminous Sensitivity 1250 volts between cathode and anode	4	13.5		amp/lumen
1750 volts between cathode and anode	30	120		amp/lumen
(See Notes 1, 3, 5)				
Last Dynode Luminous Sensitivity 1250 volts between cathode and anode		9		amp/lumen
1750 volts between cathode and anode		90		amp/lumen
(See Notes 1, 3)				
Current Amplification 1250 volts between cathode and anode		170,000		
1750 volts between cathode and anode		2,000,000		
(See Notes 3, 5)				
Equivalent Anode Dark Current Input	2×10^{-10}		2×10^{-9}	lumen
(See Notes 1, 4)				
Interelectrode Capacitances				
a) Anode to all other electrodes		3.2		µµf
b) Anode to last dynode		2.8		µµf
Time Jitter over Full Cathode (See Note 9)		3		mµs
Anode Pulse Rise Time				
With 1 mm diam. illuminated on tube face		2.5		mµs
With full cathode illuminated		4		mµs
(See Note 10)				

NOTES

- Note 1: The light source is a tungsten filament lamp operated at a color temperature of 2870°K.
- Note 2: Measured at 0 cps with 210 volts applied between cathode and all other electrodes connected together.
- Note 3: The applied voltage, V, is distributed in the following manner: 1/6 of V between cathode and dynode 1, 1/12 of V between succeeding dynodes, 1/12 of V between dynode 10 and anode. Improved pulse energy resolution and gain stability can be obtained if voltage between cathode and dynode 1 is set at four times that between succeeding stages; this mode of operation is recommended for all scintillation spectrometry work.
- Note 4: Measured at 25°C with supply voltage adjusted to give an anode luminous sensitivity of 20 amperes per lumen.
- Note 5: The focusing electrode should be varied between photocathode and dynode 1 potentials for optimum photoelectron collection efficiency. Best gain and pulse energy resolution are usually obtained with shield potential above cathode 80% of cathode - dynode 1 potential.
- Note 6: Average over a 30 second interval maximum.
- Note 7: Test performed, with no voltage applied, in each of three orthogonal axes. Reference axis is through Pins 2 and 9 on tube base.
- Note 8: Test performed, with no voltage applied, through three complete cycles at three minutes per cycle in each of three orthogonal axes. Reference axis is through Pins 2 and 9 on tube base.
- Note 9: Jitter is greatest delay between anode pulses due to position from which electrons are simultaneously released within a circle on tube face of specified diameter.
- Note 10: Measured between 10% and 90% of anode pulse height.

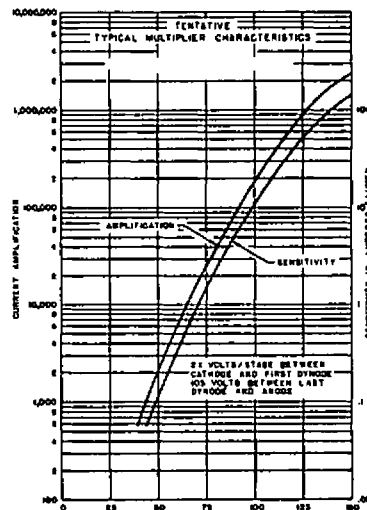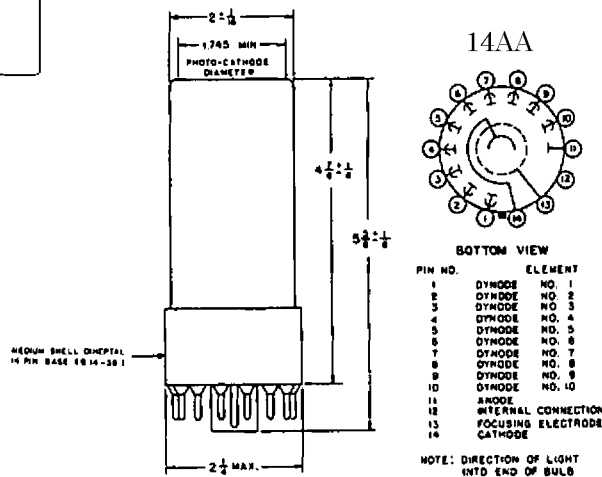

TENTATIVE AVERAGE ANODE CHARACTERISTIC
VOLTS / STAGE = 105

