## DIAMETER 31 NOMINAL

## 90E04

SORO<sub>F</sub>


## Oscilloscope Tube

ELECTROSTATIC FOCUS. ELECTROSTATIC DEFLECTION

## DATA

GENERAL:		<i>D</i> ::::::				
Heater: Voltage .		4.0				a.c. or d.c. volts.
Current		1.0				amp.
Direct Inter-electrode (	Capacita	inces.				<b></b>
Modulator to all other Each X Plate to all oth	electro	des				25µµf.
Each X Plate to all oth	er electi	rodes				25μμf.
Each Y Plate to all oth	er electi	rodes				25μμf.
One X to one Y Deflec	tor Plat	te .				6μμf.
Cathode to all other ele	ectrodes	· .				6μμf. 15μμf.
Screen:						
Fluorescence						Orange.
Afterglow						Orange.
Afterglow Persistence of Afterglow	v.					Long.
(10 sec. min./100 sec. max. for 1% initial brightness).						
Focusing Method Deflecting Method .		•		•		Electrostatic.
Deflecting Method .						Electrostatic.
Overall Length .						$332 \pm 8 \text{ mm}.$
Greatest Diameter of B	ulb .	•				90 mm.
Overall Length Greatest Diameter of B Minimum Useful Screen	n Diam	eter		•		70 mm.
Mounting Position						Any.
Base		•		•	•	B.12.D.
Pin 1—Modulator.	(	6 7			Pir	n 8—Y2.
Pin 2—Cathode.	(5)		<b>B</b>		Pir	n 9—X2.
Pin 3—Heater.		<u>`</u>	$\sim 75$		Pir	10-Anode 3 and
Pin 4—Heater.	ALE	===	$\mathbb{I}^{\infty}$		Int	ternal Conductive
Pin 5—Anode 1.	3/		10			ating.
Pin 6Anode 2.	2	$\Delta$ //	<b>发</b>			11-X1.
Pin 7—No connection.	(C)	1 (2)	$\odot$		Pir	12—Y1.
	`					
Typical Operating Conditions:						
Anode 1		2000	volte	,		2000 volts.
Anode 1	•	2000 700 4000	volts	·		350 volts.
Anode 3 (5000v. max.)		4000	volts	·		2000 volts.
Modulator volts for cut	-off	1000	, O163	,,		2000 voits.
70103 101 040		to -80	volts	<b>3.</b>		-40 to -80 volts.
Deflection Sensitivity:		mm	/2/01+			m 1 1-
X Plate				•		mm/volt.
			085			0.170
Y Plate		0.	190			0.380

- Note 2. The angle between the trace produced by X1 and X2 and the trace produced by Y1 and Y2 is  $90^{\circ} \pm 3^{\circ}$ .
- Note 3. The undeflected focused spot will fall within a circle having a 6 mm. radius concentric with the centre of the tube face.

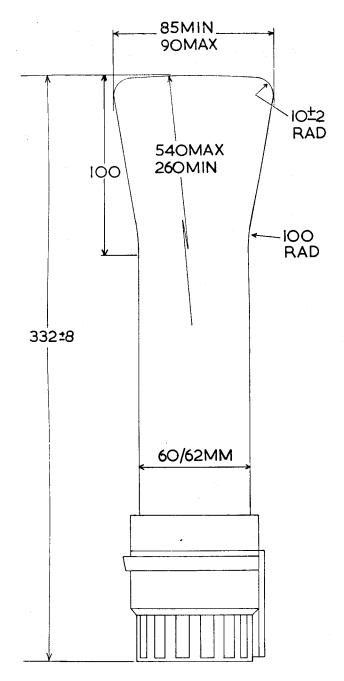

ALL SIZES IN MILLIMETRES

Note 1. When viewing the screen with the tube positioned such that the base spigot is uppermost, a positive voltage applied to the terminal X1 will deflect the spot to the left and a positive voltage applied to the terminal Y1 will deflect the spot upwards.