



## X-BAND TR LIMITER

### Service Type CV6207

The data should be read in conjunction with the Duplexer Device Preamble.

### DESCRIPTION

Broad-band single primer TR limiter.

### CHARACTERISTICS

Frequency range . . . . .	9300 to 9900	MHz
V.S.W.R. (see note 1) . . . . .	1.3:1	max
Maximum leakage:		
spike energy (see note 2) . . . . .	2.0	nJ/pulse
total power (see note 3) . . . . .	30	mW
low power . . . . .	50	mW
Recovery period to -3db (see note 3) . . . . .	3.0	$\mu$ s max
Insertion loss (see note 4) . . . . .	0.8	db max
Arc loss (see note 3) . . . . .	0.8	db max

### MAXIMUM AND MINIMUM RATINGS

	Min	Max	
Transmitter power (peak) (see note 5) . . . . .	1.0	200	kW
Primer supply voltage (negative) (see note 6) . . . . .	950	1100	V
Primer current . . . . .	70	150	$\mu$ A
Waveguide pressure . . . . .	-	300	kN/m <sup>2</sup>
		44	lb/in <sup>2</sup>
Ambient temperature (non-operating) . . . . .	-40	+70	$^{\circ}$ C


### GENERAL

Overall dimensions . . . . .	1.555 x 1.625 x 2.437 inches nom 39.50 x 41.28 x 61.90mm nom
Waveguide size . . . . .	no. 16 (0.900 x 0.400 inch internal)
Coupler . . . . .	UG-39/U
Finish . . . . .	flange faces tin or silver plated
Mounting position . . . . .	any
Net weight . . . . .	8 ounces (230g) approx

## NOTES

1. Measured at a power level below 1.0mW over the frequency range.
2. Measured at 40kW peak power, 0.1 $\mu$ s pulse length and 1000p.p.s.
3. Measured at 40kW peak power, 1.0 $\mu$ s pulse length and 1000p.p.s.
4. Measured at a power level below 10mW at 9300, 9600 and 9900MHz.
5. Operation at power levels above 50kW results in reduced life and it is recommended that in such cases the tube be preceded by a pre-TR tube.
6. Connected to the primer via a resistance of 5.5M $\Omega$ , of which at least 0.5M $\Omega$  must be adjacent to the primer top cap. The primer supply voltage must be applied at least 5 seconds before the magnetron fires.

## OUTLINE (All dimensions without limits are nominal)

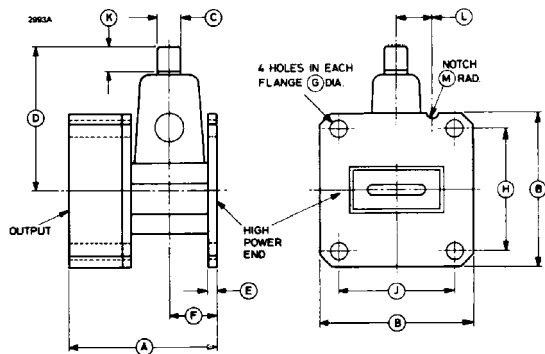

Ref	Inches	Millimetres	Ref	Inches	Millimetres
A	1.555 $\pm$ 0.005	39.50 $\pm$ 0.13	G	0.177 $\pm$ 0.004	4.5 $\pm$ 0.1
B	1.625	41.28	H	1.280	32.51
C	0.250	6.35	J	1.220	30.99
D	1.625 max	41.28 max	K	0.250 min	6.35 min
E	0.094 min	2.39 min	L	0.375 $\pm$ 0.005	9.53 $\pm$ 0.13
F	0.500	12.70	M	0.062 $\pm$ 0.031	1.57 $\pm$ 0.79

Millimetre dimensions have been derived from inches except dimension G.