


TUNG-SOL

PENTODE
MINIATURE TYPE

GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

15.0 VOLTS 0.15 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

MINIATURE BUTTON
7 PIN BASE

TCM

THE 15EW6 IS A SHARP CUTOFF PENTODE IN THE 7-PIN MINIATURE CONSTRUCTION AND HAS BEEN DESIGNED FOR INTERMEDIATE AMPLIFIER SERVICE IN TELEVISION RECEIVERS. EXCEPT FOR HEATER RATINGS, THE 15EW6 IS IDENTICAL TO THE 6EW6.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
GRID #1 TO PLATE (MAX.)	0.03	0.04	μμf
INPUT	10.0	10.0	μμf
OUTPUT	3.4	2.4	μμf

RATINGS

INTERPRETED ACCORDING TO DESIGN-MAXIMUM VALUES

HEATER CURRENT ^B	0.150±0.009	AMP.
MAXIMUM PLATE VOLTAGE	330	VOLTS
MAXIMUM SCREEN-SUPPLY VOLTAGE	330	VOLTS
MAXIMUM SCREEN VOLTAGE	SEE SCREEN RATING CHART	
MAXIMUM POSITIVE DC GRID #1 VOLTAGE	0	VOLTS
MAXIMUM PLATE DISSIPATION	3.1	WATTS
MAXIMUM SCREEN DISSIPATION	0.65	WATTS
MAXIMUM HEATER CATHODE VOLTAGE:		
HEATER POSITIVE WITH RESPECT TO CATHODE		
DC COMPONENT	100	VOLTS
TOTAL DC AND PEAK	200	VOLTS
HEATER NEGATIVE WITH RESPECT TO CATHODE		
TOTAL DC AND PEAK	200	VOLTS

DESIGN-MAXIMUM RATINGS ARE LIMITING VALUES OF OPERATING AND ENVIRONMENTAL CONDITIONS APPLICABLE TO A BOGEY ELECTRON DEVICE OF A SPECIFIED TYPE AS DEFINED BY ITS PUBLISHED DATA, AND SHOULD NOT BE EXCEEDED UNDER THE WORST PROBABLE CONDITIONS. THE DEVICE MANUFACTURER CHOOSES THESE VALUES TO PROVIDE ACCEPTABLE SERVICEABILITY OF THE DEVICE, TAKING RESPONSIBILITY FOR THE EFFECTS OF CHANGES IN OPERATING CONDITIONS DUE TO VARIATIONS IN DEVICE CHARACTERISTICS. THE EQUIPMENT MANUFACTURER SHOULD DESIGN SO THAT INITIALLY AND THROUGHOUT LIFE NO DESIGN-MAXIMUM VALUE FOR THE INTENDED SERVICE IS EXCEEDED WITH A BOGEY DEVICE UNDER THE WORST PROBABLE OPERATING CONDITIONS WITH RESPECT TO SUPPLY-VOLTAGE VARIATION, EQUIPMENT COMPONENT VARIATION, EQUIPMENT CONTROL ADJUSTMENT, LOAD VARIATION, SIGNAL VARIATION, AND ENVIRONMENTAL CONDITIONS.

^AWITH EXTERNAL SHIELD (EIA 316) CONNECTED TO CATHODE.

CONTINUED ON FOLLOWING PAGE

TUNG-SOL



CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

PLATE VOLTAGE	125	VOLTS
SUPPRESSOR, CONNECTED TO CATHODE AT SOCKET		
SCREEN VOLTAGE	125	VOLTS
CATHODE-BIAS RESISTOR	56	OHMS
PLATE RESISTANCE (APPROX.)	0.2	MEGOHMS
TRANSCONDUCTANCE	14 000	μMHOS
PLATE CURRENT	11	MA.
SCREEN CURRENT	3.2	MA.
GRID #1 VOLTAGE (APPROX.) $I_b = 20 \mu\text{AMPS.}$	-3.5	VOLTS

^B THE EQUIPMENT DESIGNER SHALL SO DESIGN THE EQUIPMENT THAT THE FILAMENT VOLTAGE IS CENTERED AT THE SPECIFIED BOGEY VALUE.

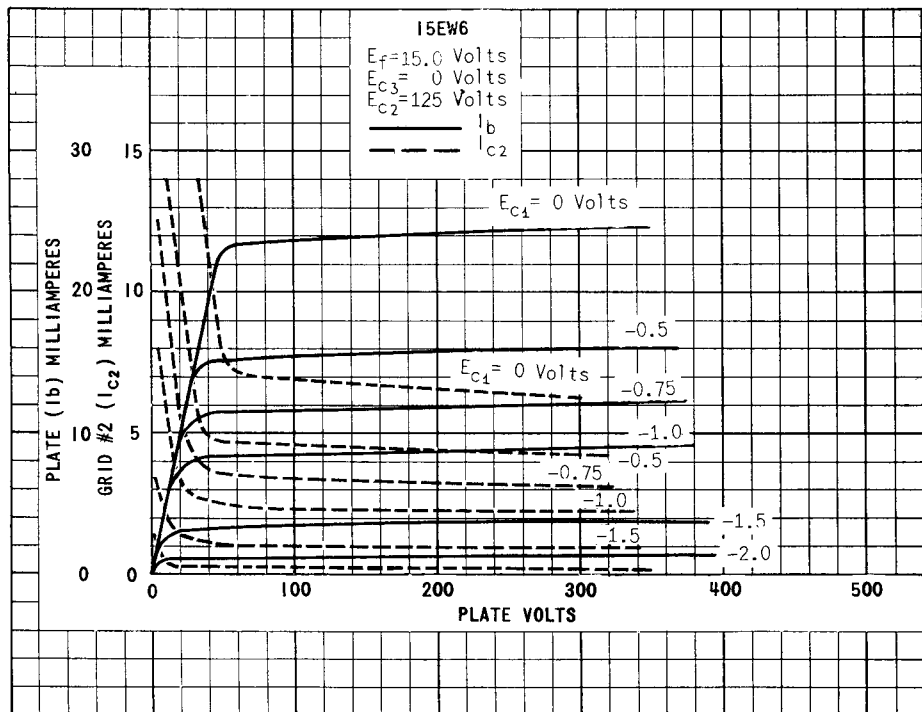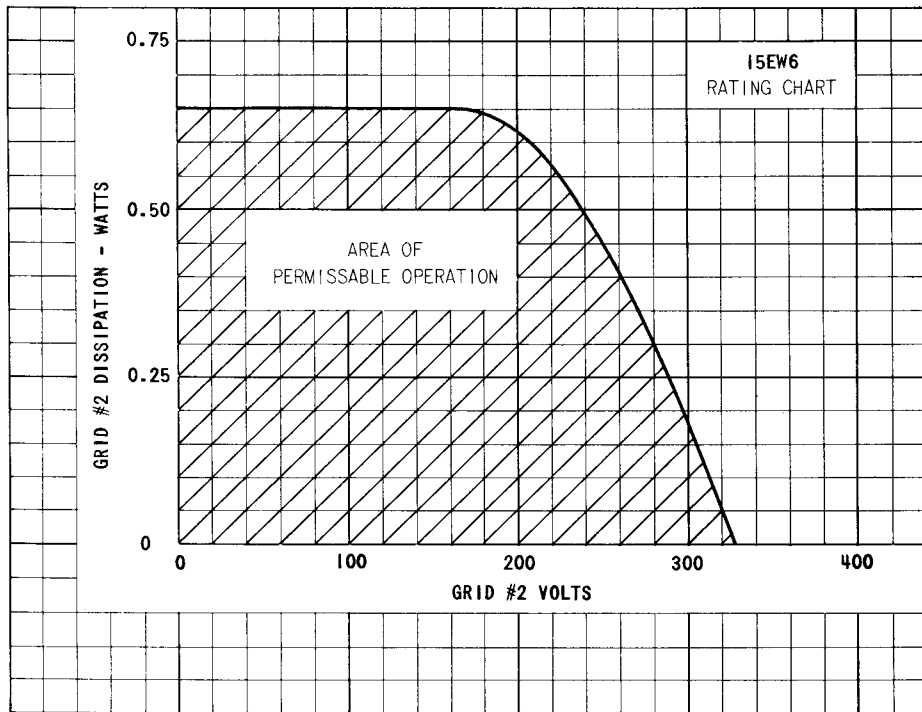

PRINTED IN U. S. A.

15EW6

