

DESCRIPTION

The F-8034 is a high vacuum, external anode diode designed for rectifier service or in special applications in shunting or charging circuits wherever high peak inverse voltages, extreme environmental conditions, or high operating frequencies and transients are present. The exceptionally rugged construction, free of internal insulators, spring tensioning devices and fragile elements, make this type adaptable to a wide range of uses. The anode is forced air-cooled and is capable of dissipating 3 kilowatts. The cathode is a thoriated tungsten filament.

ELECTRICAL

Filament Voltage

Filament Current			51	amperes
Maximum Ratings:	Shunt	Charging	Rectifier	
Max. Peak Inverse Voltage	25	25	25	kilovolts
Max. Peak Plate Current **	70	4.5 rms	20	amperes
Max. Average Plate Current	*	-	3.0	amperes

- **Maximum peak plate current for shunt conditions are rated under conditions of filament excitation voltage of 8.25 volts.
- A Because of the wide variety of operating conditions, it is advisable that tube operation recommendations be obtained from our Engineering Department for specific conditions.

* Formerly D-1045



7.5 volts


MECHANICAL


Mounting Position Type of Cooling			anode Forced	up or down
Anode Air Flow Required		•	Orceu	WTY.
Plate Dissipation	1.8	2.4	3.0	kilowatts
Air Flow, minimum	90	130	165	cfm
Pressure	1.0	2.0	3.0	inches of water
Max. Incoming Air Temperature			20	*C
Max. Glass & Seal Temperature‡			180	*C
Net Weight, approx.			6.75	pounds

Additional information for specific applications can be obtained from the:

Electron Tube Applications Section ITT Components Division P.O. Box 412 Clifton, New Jersey

^{*} A temperature sensitive lacquer manufactured by the Tempil Corporation, 132 West 22nd Street, New York, New York, is convenient for this measurement.

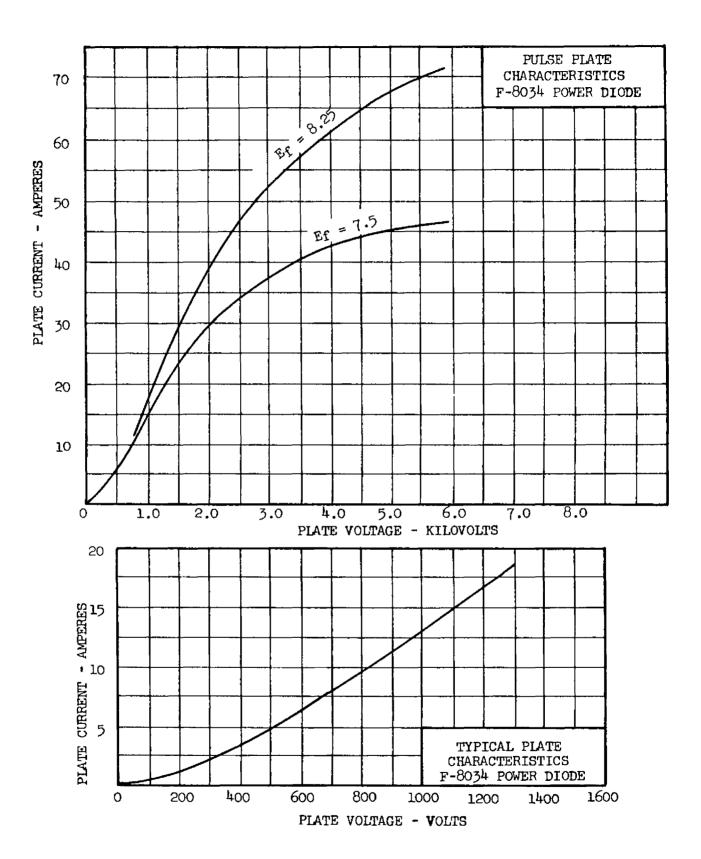

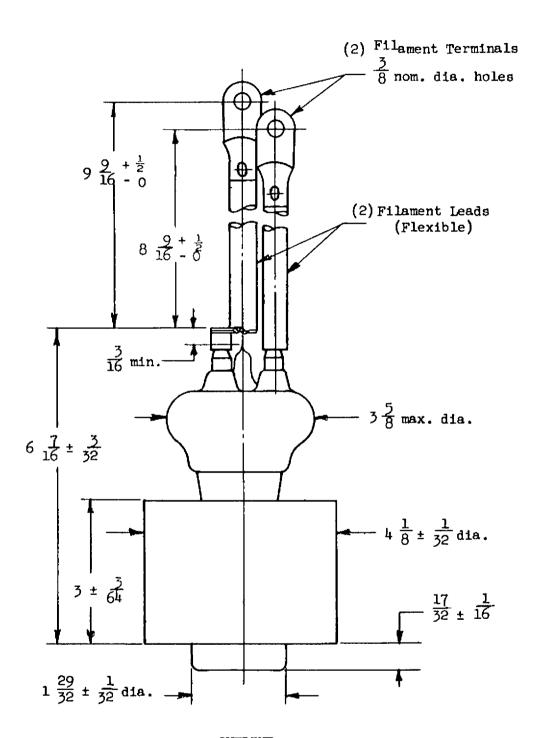

ACCESSORIES

OUTLINE F-8034 POWER DIODE

Air Jacket - RT-54893 (Ordering No.) - RT-54894 (Outline Dwg.)

10-61